

BHAGWAN

INSTANT WATER HEATER

SINGLE POINT

Features

- High Quality UK Technology Heating Element
- Triple Safety Protection
 - Built-in auto water flow-sensor device switch
 - Built-in 15 mA sensitivity electronic ELCB
 - Upgraded Anti-scalding thermal safety design
- Electronic Variable Power Temperature Control
- Built-in Lightning Surge Protector (ELCB)
- Suitable for High and Low Water Pressure
- Stylish 5 Spray Setting Hand Shower
- Splash Proof Protection IP25
- DT - Double Thermal Safety Protection
 - 55°C Anti-Scalding Thermal Cut Out.
 - 90°C Prevent Abnormal Overheat Thermal Cut Out



Model: BHC 3500



Anti-Scalding System & Earth Leakage Current Breaker



Built For Durability



Energy Saving



Auto Flow Switch Prevents Overheating Caused By Blockage



Eco-Friendly Technology



Built-in Lighting Surge Protector (ELCB)



Splash Proof IP25 Protection

Specifications

Type	Electronic Power Control
Electrical Loading	4.5kW 20.5A 220V 50/60Hz
Min. Water Flow Rate	2.0 litre / min
Working Pressure	Min 0.2 Bar -Max 6.0 Bar
Water Connection	1/2" BSP Single Point System
Dimension	220mm (W) X 340mm (H) X 101mm (D)
Weight	2.4kg (No Pump)



ISO 9001 Certified Manufacturer



001



MADE IN MALAYSIA



SIRIM TESTED



ST APPROVED



SINGAPORE



SPRING APPROVED



VIETNAM



THAILAND

Distributed by:

BHAGWAN

INSTANT WATER HEATER

SINGLE POINT

Features

- High Quality UK Technology Heating Element
- Triple Safety Protection
 - Built-in auto water flow-sensor device switch
 - Built-in 15 mA sensitivity electronic ELCB
 - Upgraded Anti-scalding thermal safety design
- Electronic Variable Power Temperature Control
- Built-in Lightning Surge Protector (ELCB)
- Suitable for High and Low Water Pressure
- Stylish 5 Spray Patterns Hand Shower
- Splash Proof Protection IP25
- DT - Double Thermal Safety Protection
 - 55°C Anti-Scalding Thermal Cut Out.
 - 90°C Prevent Abnormal Overheat Thermal Cut Out



Model: BHC 3530



Anti-Scalding System & Earth Leakage Current Breaker



Built For Durability



Energy Saving



Auto Flow Switch Prevents Overheating Caused By Blockage



Eco-Friendly Technology



Built-in Lighting Surge Protector (ELCB)



Splash Proof IP25 Protection

Specifications

Type	Electronic Power Control
Electrical Loading	5.6kW 25.5A 220V 50/60Hz
Min. Water Flow Rate	2.0 litre / min
Working Pressure	Min 0.2 Bar -Max 6.0 Bar
Water Connection	1/2" BSP Single Point System
Dimension	218mm (W) X 340mm (H) X 112mm (D)
Weight	2.6kg (No Pump)



ISO 9001 Certified Manufacturer



001



MADE IN MALAYSIA



SIRIM TESTED



ST APPROVED

MALAYSIA



SPRING APPROVED



SINGAPORE



VIETNAM



TISI APPROVED



TE 1693-2347



THAILAND

Distributed by:

BHAGWAN

INSTANT WATER HEATER


SINGLE POINT

Features

- High Quality UK Technology Heating Element
- Triple Safety Protection
 - Built-in auto water flow-sensor device switch
 - Built-in 15 mA sensitivity electronic ELCB
 - Upgraded Anti-scalding thermal safety design
- Electronic Variable Power Temperature Control
- Built-in Lightning Surge Protector (ELCB)
- Suitable for High and Low Water Pressure
- Stylish 5 Spray Setting Hand Shower
- Splash Proof Protection IP25
- DT - Double Thermal Safety Protection
 - 55°C Anti-Scalding Thermal Cut Out.
 - 90°C Prevent Abnormal Overheat Thermal Cut Out



Model: BHC 3580

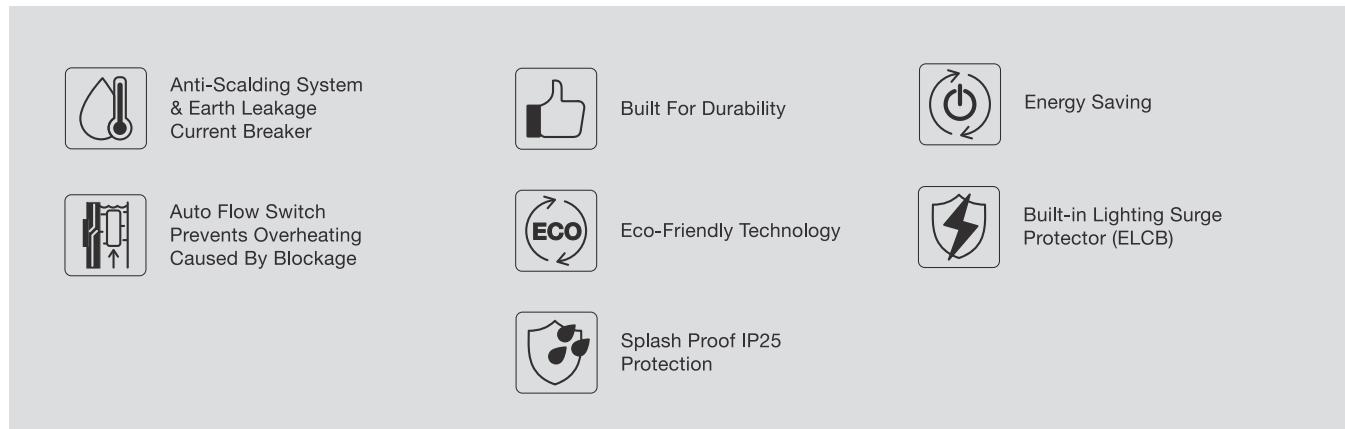

Specifications

Type	Electronic Power Control
Electrical Loading	4.5kW 20.5A 220V 50/60Hz
Min. Water Flow Rate	2.0 litre / min
Working Pressure	Min 0.2 Bar -Max 6.0 Bar
Water Connection	1/2" BSP Single Point System
Dimension	220mm (W) X 340mm (H) X 101mm (D)
Weight	2.4kg (No Pump)



Distributed by:

BHAGWAN


INSTANT MULTIPONT WATER HEATER

Features

- High Quality UK Technology Heating Element
- Double Safety Protection
 - Built-in 15 mA sensitivity Mechanical ELCB
 - Upgraded Anti-scalding thermal safety design
- Electronic Variable Power Temperature Control
- Built-in Lightning Surge Protector (ELCB)
- Suitable for High and Low Water Pressure
- Splash Proof Protection IP25
- DT - Double Thermal Safety Protection
 - 65°C Anti-Scalding Thermal Cut Out.
 - 90°C Prevent Abnormal Overheat Thermal Cut Out



Model: BHC 3588

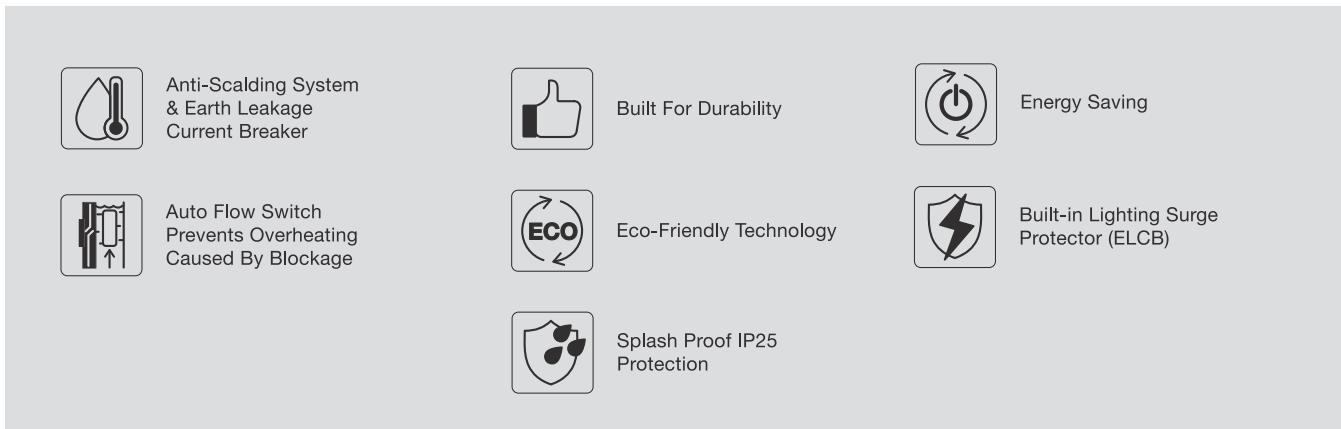

Specifications

Type	Electronic Power Control
Electrical Loading	6.0kW 27.3A 220V a.c. 50/60Hz
Min. Inlet Water Pressure	0.1 Bar (10kPa)
Max. Inlet Water Pressure	6.0 Bar (0.6MPa)
Water Connection	1/2" BSP Multi Point System
Dimension	155mm X 83mm X 248mm
Weight	1.5kg (MP)



Distributed by:

BHAGWAN

BHAGWAN HEATER CORPORATION

75 Sto. Domingo St. cor. Don Manuel St.,

Quezon City, Philippines

Tel nos: 8712-0788 / 8712-0799 / 8245-9665 Fax no. (632) 8731-7922



BHC-3588

MODEL	BHC-3588
SPECIFICATIONS	MULTIPOINT (6.0 KW)
RETAILER PRICE	PHP 7,895.00



BHC-3500



MODEL	BHC-3500
SPECIFICATIONS	SINGLEPOINT (4.5 KW) w/ 5 Setting Hand Shower Set & Railing w/ Soap Dish
RETAILER PRICE	PHP 5,895.00



BHC-3580

MODEL	BHC-3580
SPECIFICATIONS	SINGLEPOINT (4.5 KW) w/ 5 Setting Hand Shower Set & Railing w/ Soap Dish
RETAILER PRICE	PHP 5,895.00



BHC-3530



MODEL	BHC-3530
SPECIFICATIONS	SINGLEPOINT (5.6 KW) w/ 5 Setting Hand Shower Set & Railing w/ Soap Dish
RETAILER PRICE	PHP 6,395.00

- All BHC Models are equipped with Earth Leakage Circuit Breakers (ELCB).
- All units come with free installation within Metro Manila.
- Materials needed like supply hoses & GI stainless fittings are not included in the price.

BHAGWAN HEATER CORPORATION

75 Sto. Domingo St. cor. Don Manuel St., Quezon City, Philippines

Tel nos: 8712-0788 / 8712-0799 / 8245-9665 Fax no. (632) 8731-7922

Email: bhagwanheater@yahoo.com Website: <http://bhagwanheater.com/>